



ISO 05 HYDRAULIC STACKABLE VALVES type **AM5-MP** PRESSURE RELIEF – PILOT OPERATED


- Hydraulic pressure relief valves, pilot operated
- **ISO 05** interface, stackable assembly
- Adjustment by screw with locking nut
- Max operating pressure : 320 bar
- Nominal flow: 100 l/min
- Mass: 2,7kg single valve (3,6kg dual)
- Suitable for mineral oil according to ISO 18/16/14 filtration class or better.
Recommended viscosity range: 10 to 60cSt

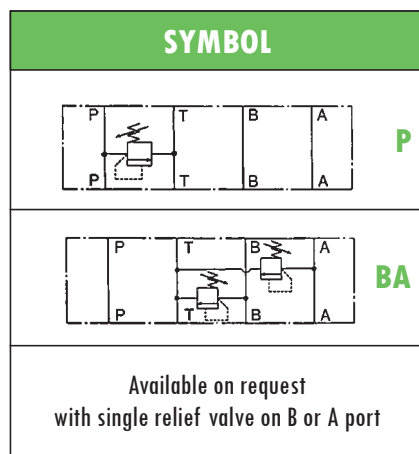

ORDERING CODE	
AM5 – MP – P / 20	
AM5	ISO 05 stackable valve
MP	Pilot operated pressure relief valve
P	P: Relief on P (see symbol) – A, B and T free BA: Relief on A, B (see symbol) – P, T free
20	Setting range: 12,5 = 10 to 140 bar 20 = 20 to 210 bar 32 = 20 to 320 bar

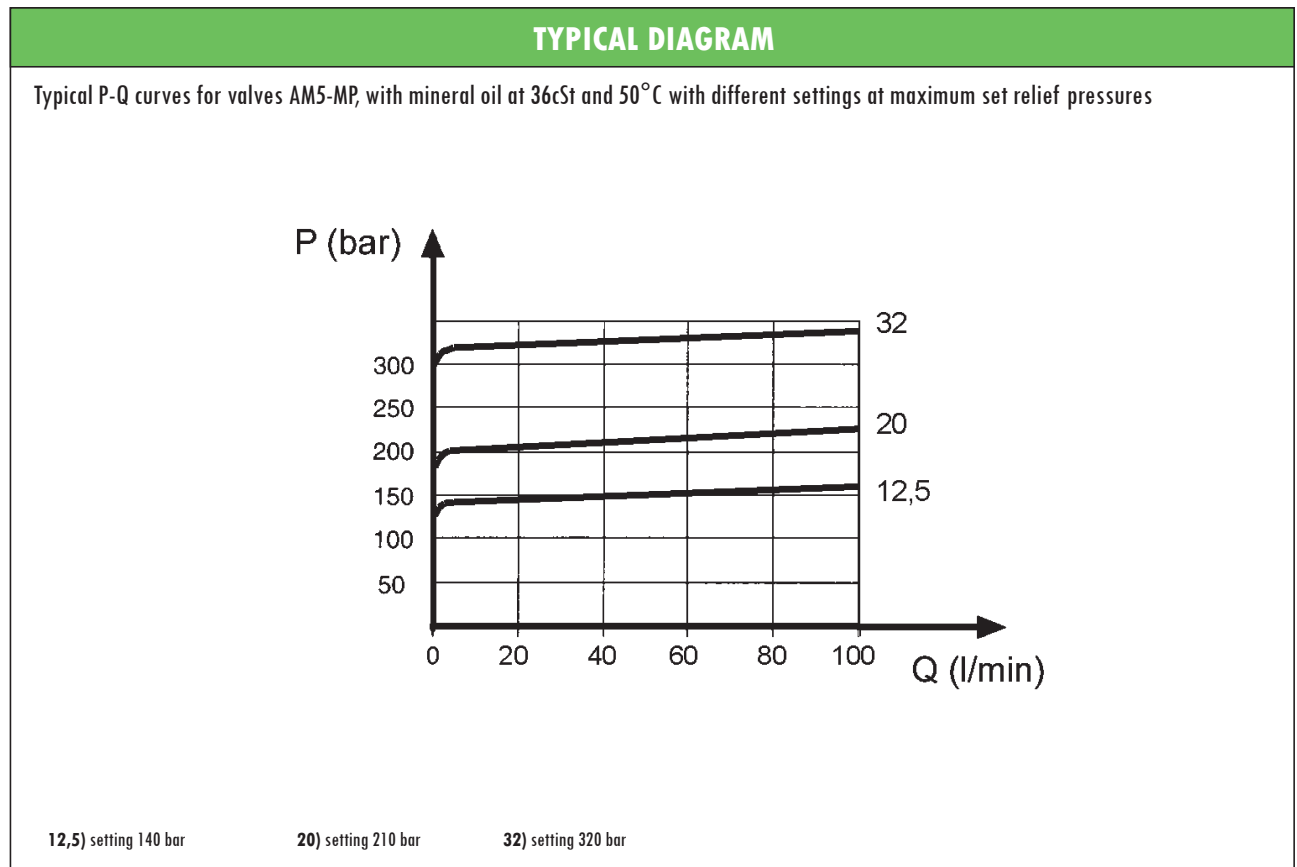

OVERALL DIMENSIONS

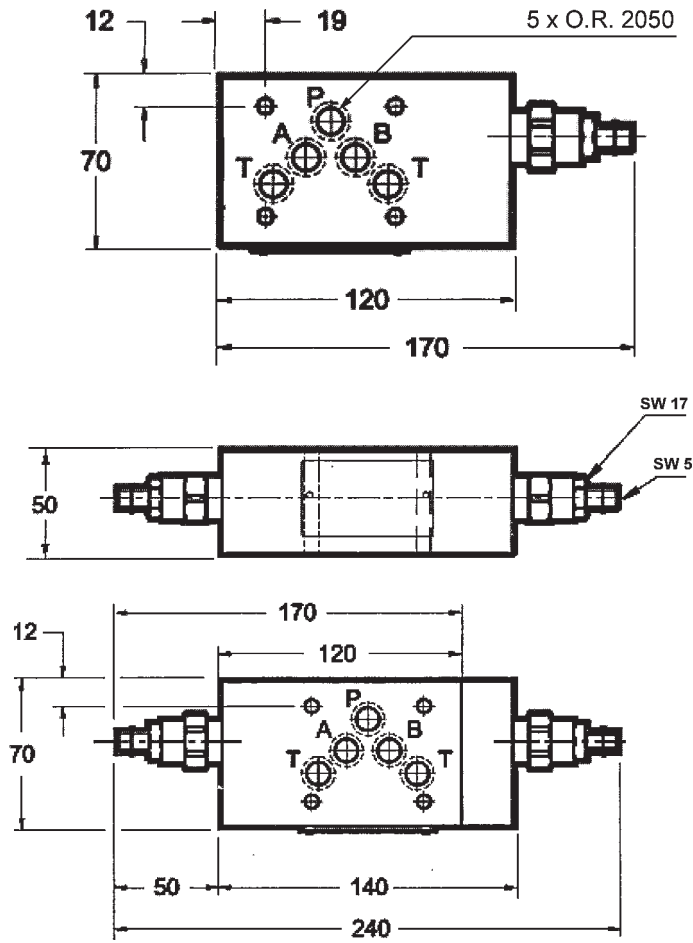

Subject to technical and dimensional changes without notice

TYPICAL SECTION

1	Body	6	Pilot poppet
2	Locking nut	7	Seal
3	Setting screw	8	Seal
4	Main poppet	9	Seal
5	Spring		

