



## Dimensioni





TSD\*\*\*\*S



TSD\*\*\*\*A

TSD\*\*\*\*F

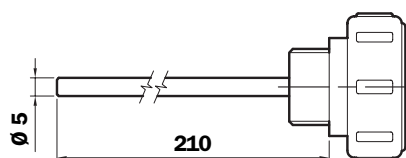

**TSD (Materiali)**

- 1 - Corpo: Nylon
- 2 - Coperchio: Nylon
- 3 - Guarnizione: NBR
- 4 - Filtro: Acciaio Zincato
- 5 - Frangiflusso: Nylon
- 6 - Asta: Acciaio Fosfatato

**Quantità per confezione Nr. Pezzi**

**TSD** 25

Grand.	A	Ø B	C	D	Ø E	Ø F	G
<b>G16</b>	G 3/8"	35	21	10	23	13,5	36
<b>G20</b>	G 1/2"	39	21	11	27	17,5	36
<b>G26</b>	G 3/4"	45	21	12	33	23,5	37
<b>G33</b>	G 1"	51	24,5	13	39	29,5	44
<b>G42</b>	G 1 1/4"	66	29,5	14	54	38	47
<b>G48</b>	G 1 1/2"	66	29,5	14	54	38	47


**N.B.** Spessore guarnizioni 2 mm.  
Coppia di serraggio consigliata 10÷15 Nm.

## Codice d'ordinazione

**Tappo di carico**

**TSD**

Esempio: TSD



**1 - Grandezza**

- G16** G 3/8"
- G20** G 1/2"
- G26** G 3/4"
- G33** G 1"
- G42** G 1 1/4"
- G48** G 1 1/2"

**2 - Colore coperchio**

- R** Rosso
- Y** Giallo

**3 - Dicitura coperchio**

- N** Neutro
- O** Oil
- G** Gasoil

**4 - Guarnizione**

- A** NBR

**5 - Elemento filtrante**

- A** Acciaio (escluso "Gasoil")
- O** Senza

**6 - Accessori**

- S** Senza
- A** Asta standard
- F** Frangiflusso

**7 - Opzioni**

- P01** MP Filtri standard