



HYDRAULIC COMPACT STACKABLE VALVES type **AMF-MO-AB** PRESSURE RELIEF – DIRECT ACTING


- Hydraulic pressure relief valves, direct acting
- **AMF / HDF** interface, stackable assembly
- Adjustment by screw with locking nut
- Max operating pressure: 250 bar
- Max flow rate: 20 l/min service lines (P, T)
6 l/min bleeding lines (A, B)
- Mass: 0,30 kg
- Standard pressure range up to 250 bar
- Suitable for mineral oil according to ISO 18/16/14 filtration class or better.
Recommended viscosity range: 10 to 60cSt

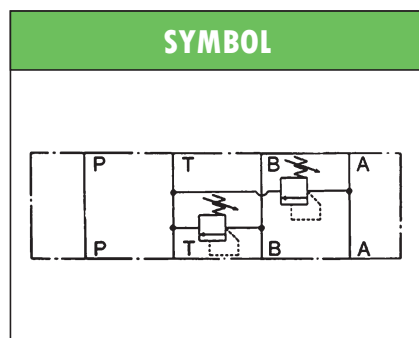


ORDERING CODE	
AMF – MO – AB	
AMF	AMF compact stackable module
MO	Pressure relief, direct acting
AB	Control on A and B lines

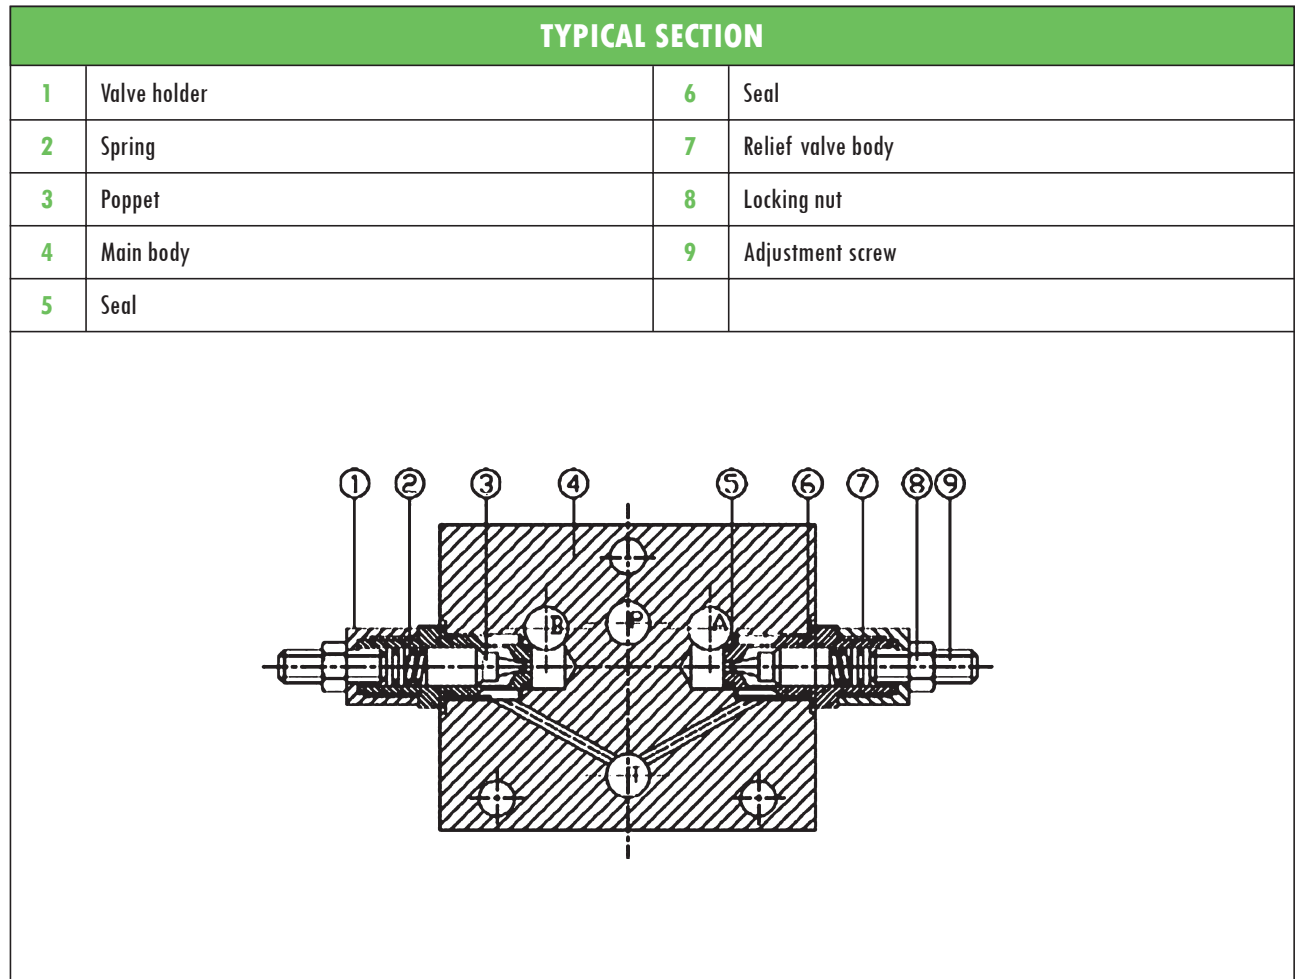

OVERALL DIMENSIONS

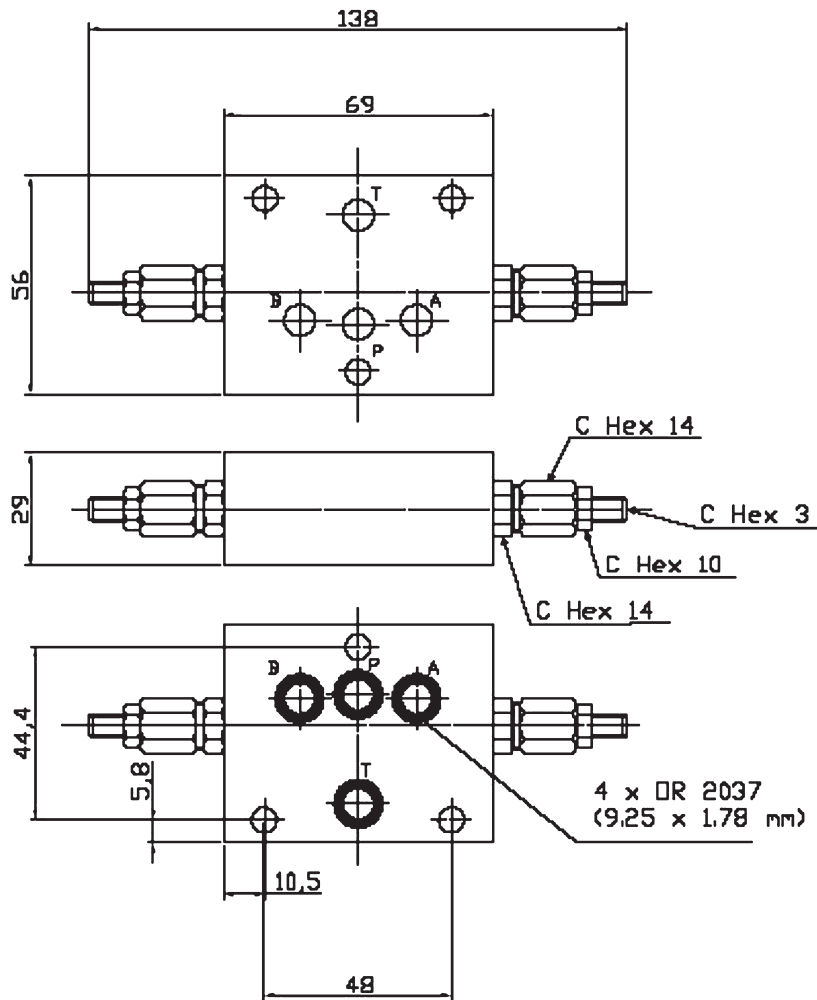

Available, for P, T, A and B lines,
a restrictor with O ring



D (mm)	CODE
1,0	35-10
1,5	35-15
2,0	35-20
2,5	35-25

