


### ISO 03 BY-PASS VALVES type **AM3-DQ** STACKABLE TYPE - SOLENOID OPERATED

- 4-way solenoid operated by-pass valves
- **ISO 03** interface
- Suitable for flow control valves type QVC-06 (see table QV-325)
- Nominal flow rate: 32 l/min (free flow)
- Maximum pressure: 250 bar
- 100% duty cycle
- Suitable for mineral oil according to ISO 18/16/14 filtration class or better.  
Recommended viscosity range: 10 to 60cSt



SYMBOL	
	<b>AC</b>
	<b>PC</b>
<p>Available on request with meter-out control on B line or T line</p>	

ORDERING CODE	
<b>AM3 – DQ – AC – 24</b>	
<b>AM3</b>	ISO 03 stackable valve
<b>DQ</b>	Adjustable flow control (valve not included)
<b>AC</b>	<b>AC</b> : normally closed, meter-out A <b>PC</b> : normally closed, meter-in P
<b>24</b>	Standard coil voltage: 12 - 12V DC (see coil C30-012C tab AC-100) 24 - 24V DC (see coil C30-024C tab AC-100)

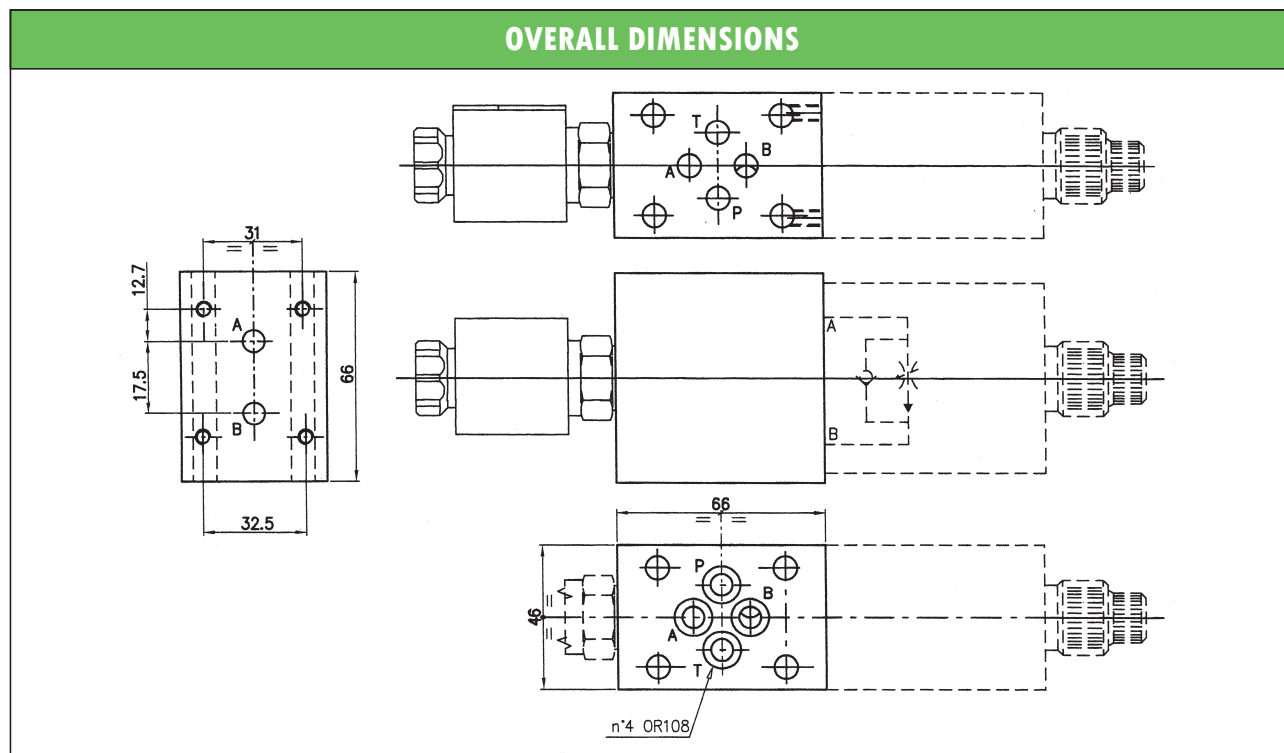

Subject to technical and dimensional changes without notice