

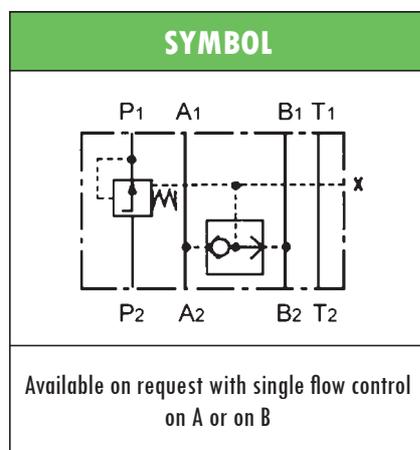


ISO 03 HYDRAULIC STACKABLE VALVES type AM3-PC 2-WAY PRESSURE COMPENSATOR


- Direct acting 2-way pressure compensator
- ISO 03 interface, stackable assembly
- Max operating pressure : 320 bar
- Max recommended flow: 32 l/min
- Pressure compensator Δp : 10bar
- Mass: 1,1 kg
- Suitable for mineral oil according to ISO 18/16/14 filtration class or better.
Recommended viscosity range: 10 to 60cSt

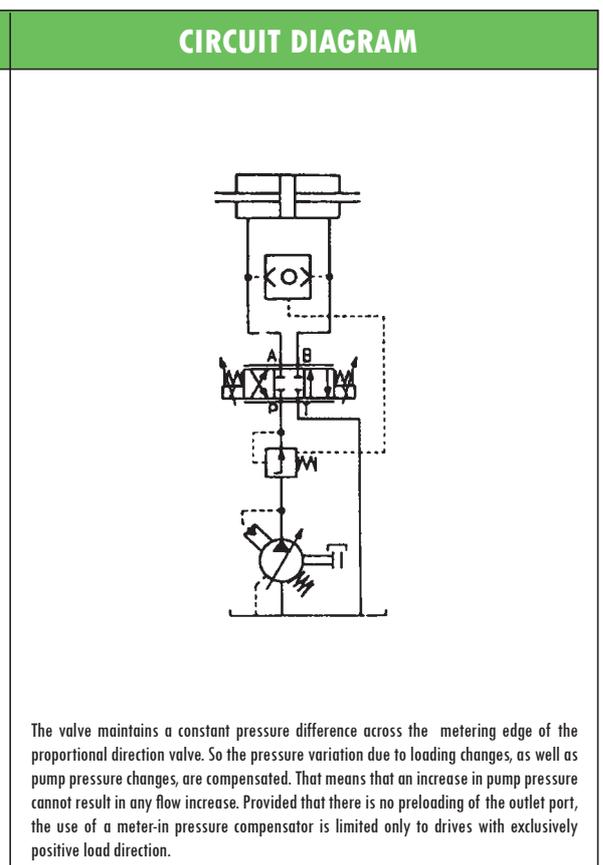

ORDERING CODE	
AM3 – PC – P	
AM3	ISO 03 stackable valve
PC	2-way pressure compensator valve
P	Control on port P with A or B selection

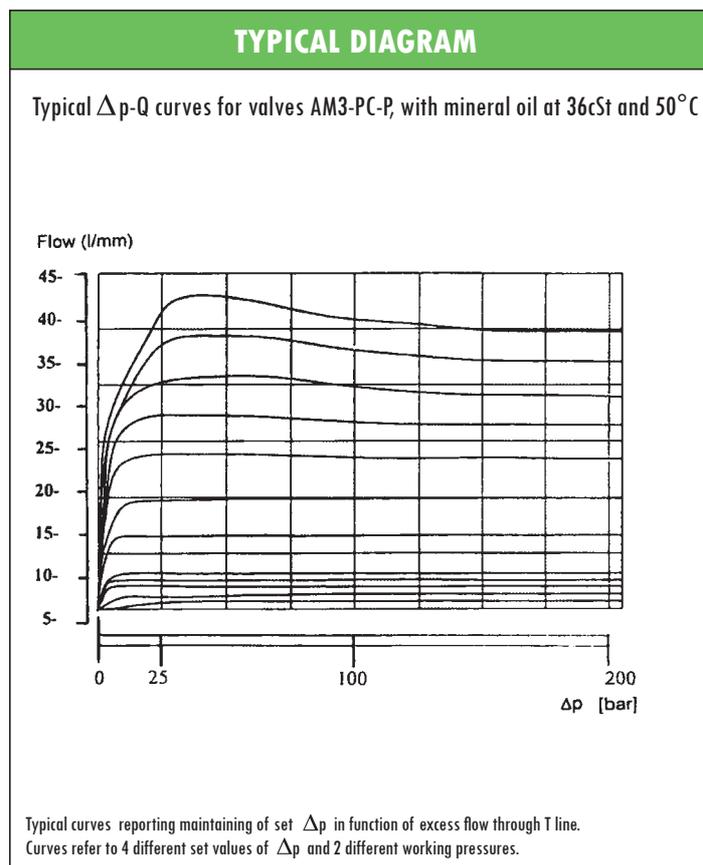

OVERALL DIMENSIONS

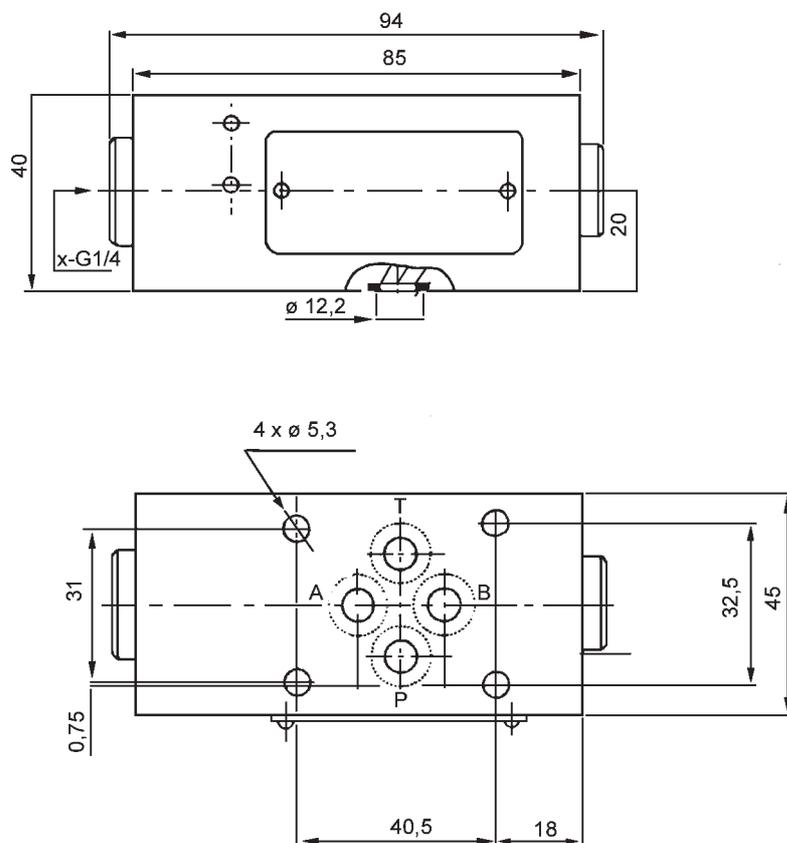

Subject to technical and dimensional changes without notice

TYPICAL SECTION

1	Body	3	Spring
2	Control spool	4	Shuttle valve

