

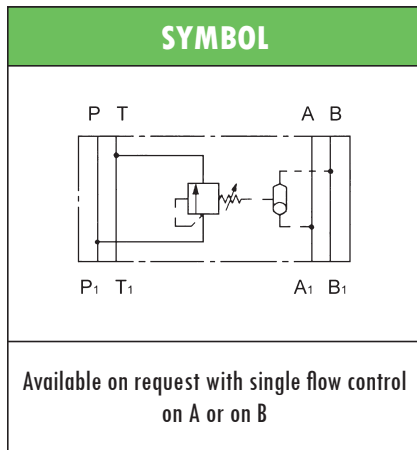


ISO 03 HYDRAULIC STACKABLE VALVES type **AM3-LS** 3-WAY PRESSURE COMPENSATOR - LOAD SENSING


- Pilot operated 3-way pressure compensator
- Load sensing feature
- **ISO 03** interface, stackable assembly
- Adjustable Δp (from 5 to 40 bar) by screw
- Max operating pressure : 320 bar
- Max recommended flow: 40 l/min
- Mass: 1,5 kg
- Suitable for mineral oil according to ISO 18/16/14 filtration class or better.
Recommended viscosity range: 10 to 60cSt

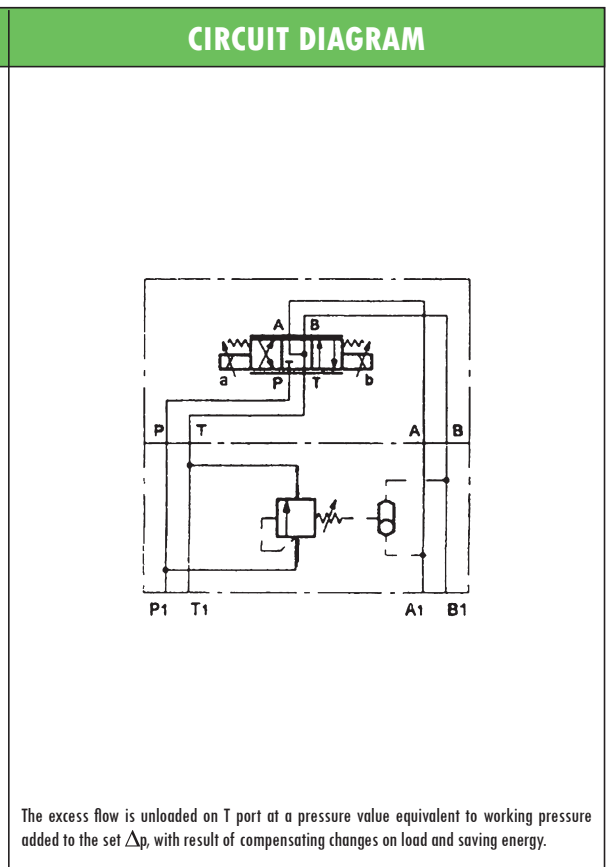

ORDERING CODE	
AM3-LS-P3	
AM3	ISO 03 stackable valve
LS	Load sensing compensator, Δp adjustable from 5 to 40bar
P	Control on port P with A or B selection of pilot pressure
3	3-way pressure compensator

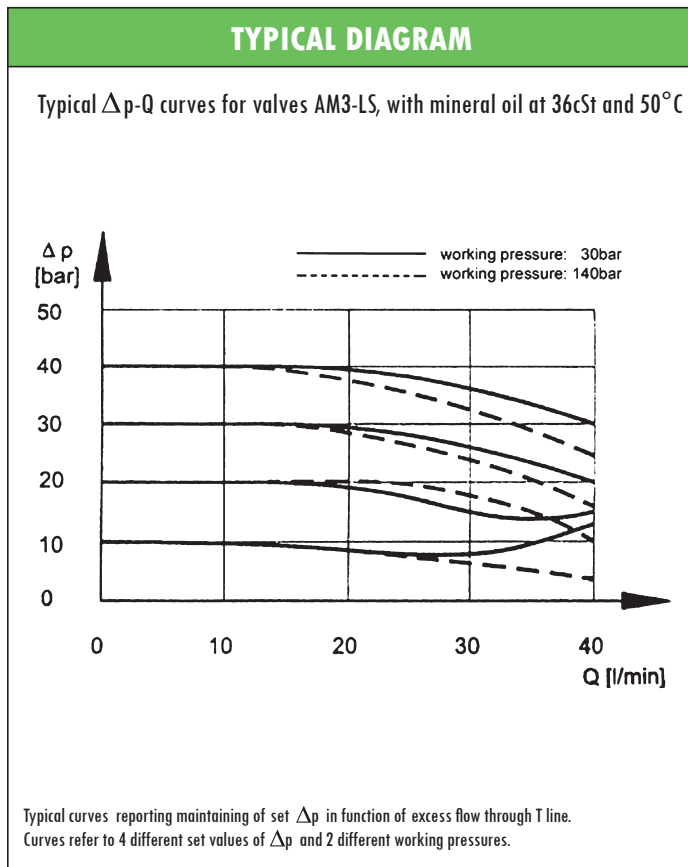

OVERALL DIMENSIONS

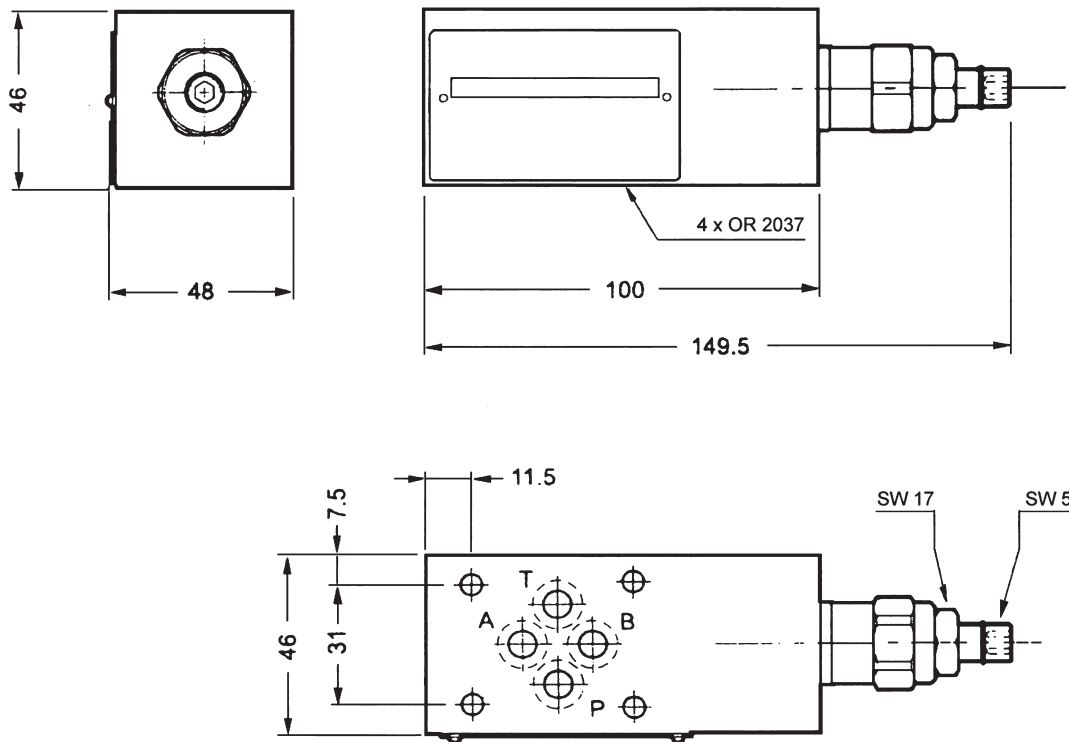

Subject to technical and dimensional changes without notice

TYPICAL SECTION

1	Body	4	Regulating spool
2	Set screw	5	Spring
3	Locking nut	6	Load sensing pilot line

