



HYDRAULIC SCREW-IN SPOOL VALVES type **EV4**.34** 4-WAY SOLENOID OPERATED

- Suitable for standard cavity **3/4" 16 UNF**
- Maximum operating pressure: **250 bar**
- Maximum recommended flow rate: **20 l/min**
- 100% duty cycle
- Steel body
- Spool in hardened and grinded steel
- Mass **0,40 kg** (coil included)


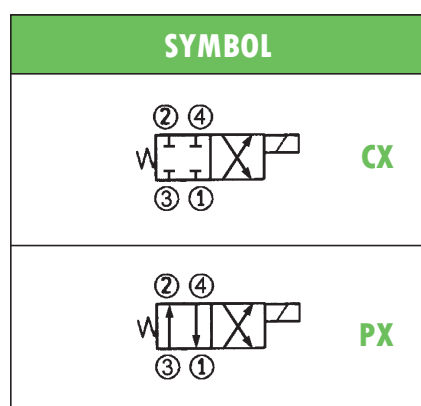


ORDERING CODE	
EV4CX.34.03	
EV4	4-way solenoid operated spool valve
CX	CX: normally closed (see symbol) PX: normally open (see symbol)
34	Nominal size (3/4" 16 UNF)
03	Standard execution

COIL	Ø13 / 22W — Plugs (not included) according to ISO 4400: see table AZ-100
C36-012C	12V DC — 1,9A — 6,3Ω at 20°C — 22,8W nominal power — Insulation class H
C36-024C	24V DC — 0,95A — 25,6Ω at 20°C — 22,5W nominal power — Insulation class H
C36-220R	230V RAC (rectifier plug needed) — 0,11A — 1720Ω at 20°C — 22,3W nominal power — Insulation class H

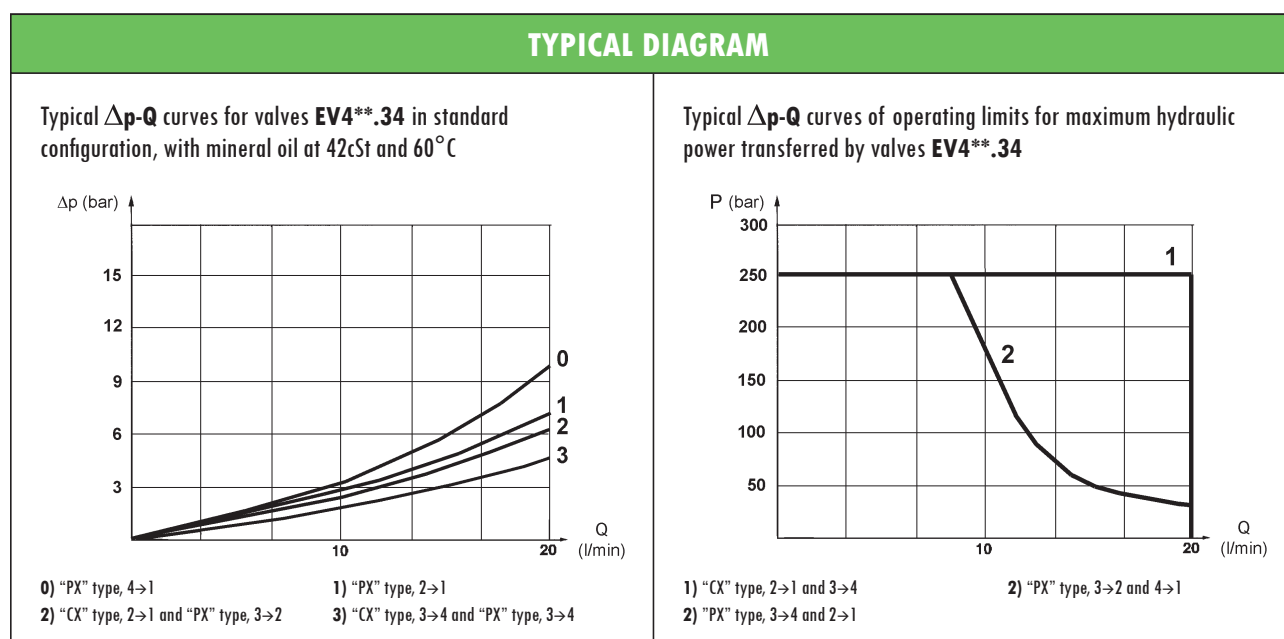


OVERALL DIMENSIONS

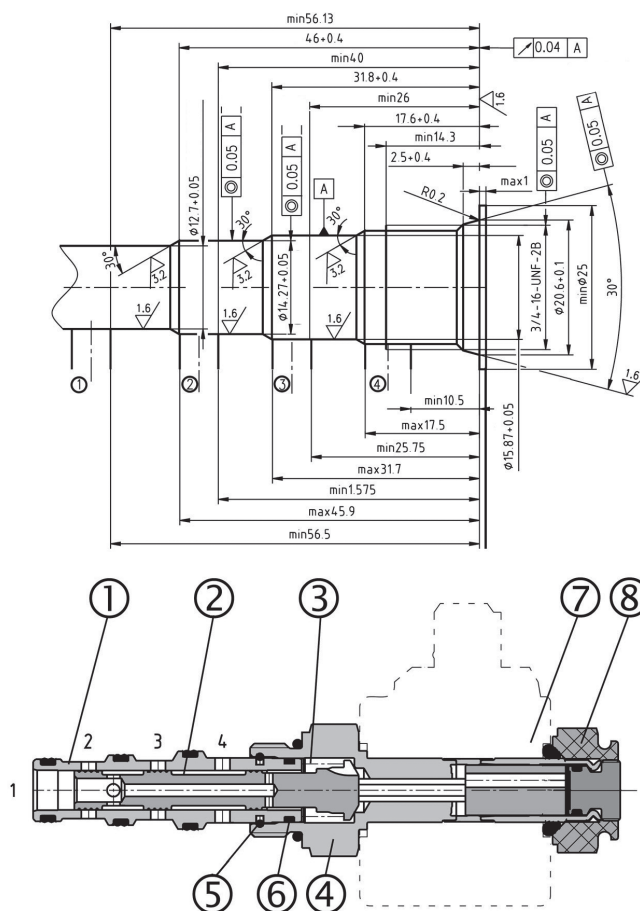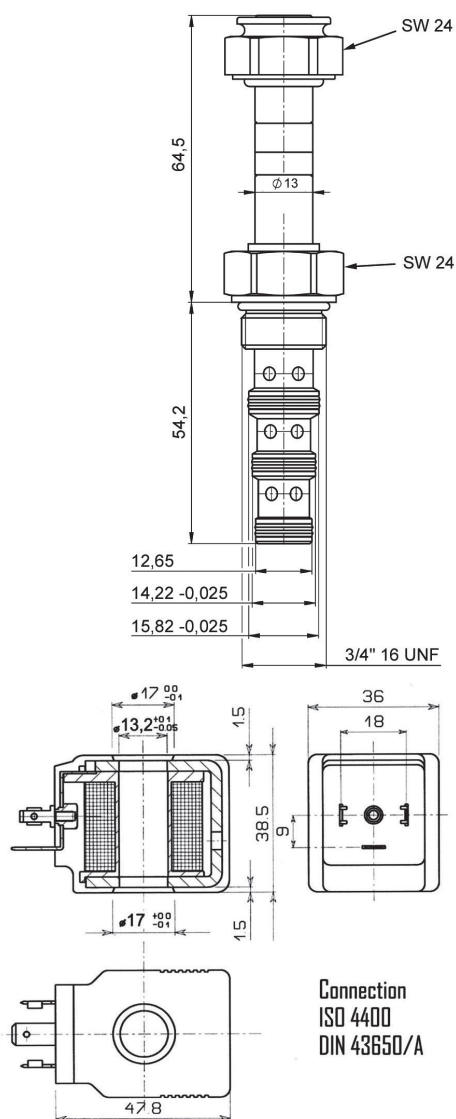

1	Body	5	Wire ring
2	Spool	6	Seal
3	Spring	7	Coil
4	Cartridge	8	Retaining nut

Subject to technical and dimensional changes without notice

LINE ASSEMBLY BODY

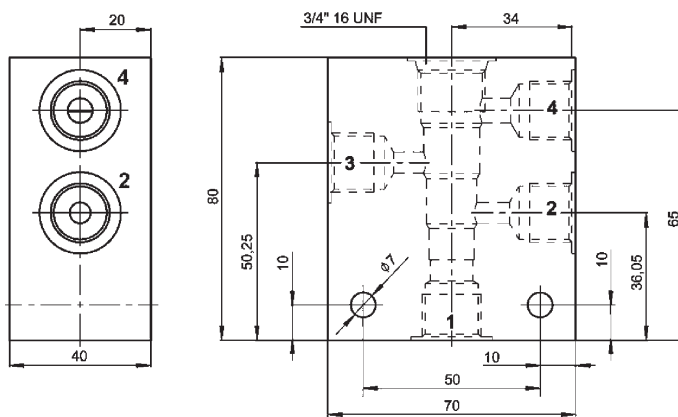

Code	Ports
LAB-34-4/38	3/8" BSP
Mass: 0,54 kg	

Suitable for standard 4-way screw-in valves, cavity 3/4" 16 UNF. Designed for in-line assembly. Material: aluminium.